


Compact Luminaire



St. Joseph Hospital


** Emergency kit optional*

Astra Fluorescent Luminaire

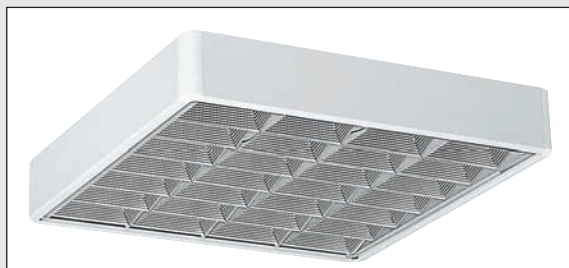


AC-SN
2701

Surface mounted fluorescent fitting with bright aluminum single parabolic louvers with stepped transversal blades. This insures a high performance with good visual comfort and an economical solution intended for universal use.

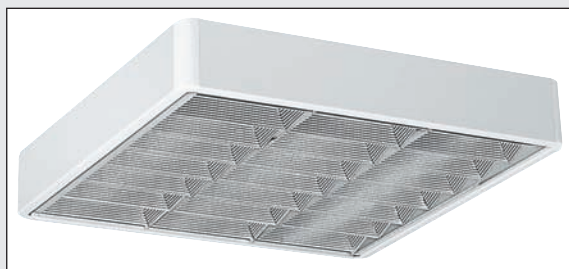

AC-SB
2702

Single parabolic bright reflector made of preanodised high quality low iridiscence aluminum with christmas tree stepped transversal blades, offering a high light output ratio and a uniform distribution of light flux.

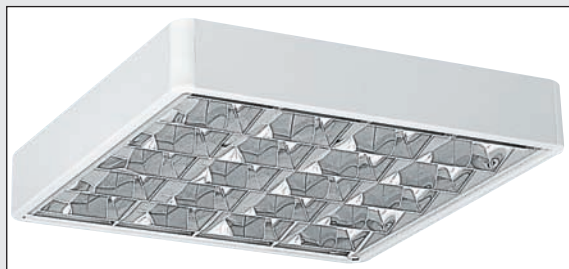

AC-DB
2703

Double parabolic bright reflector made of preanodised, high quality, low iridiscence aluminum. This luminaire insures a low luminance at cut-off angles and exceptional visual comfort where extensive use of VDT's is required. The high gloss reflector has a dark light effect.



AC-DM
2704

Double parabolic matt-finish high performance reflector made of preanodised, low iridiscence high quality aluminum. This low glare fixture has the advantage of minimizing the contrast between the ceiling and the louver making it suitable for intensive use in VDT areas.



AC-PR
2705

Prismatic methacrylate diffuser enclosed in a tight aluminum frame finished white equipped with a sealing gasket (optional) and spring catches for easy maintenance. IP 44 optional

AC

Surface mounted compact fluorescent fitting with reduced dimensions for an aesthetic and decorative appearance. Corners are made of round white injected resin. These efficient luminaires are intended for the following applications:

- Waffle ceilings
- Corridors
- Halls
- Parkings
- Kitchens

Sheet steel compact housing painted white electrostatically, equipped with either 4x15w tubular fluorescent lamps or 3x36w compact fluorescent lamps for high ceilings. These fixtures can be fitted with a wide range of louvers and supplied with a back mirror behind each lamp (optional for the other series).

		lamps	L	W	H
AC 415	LOUVER CODE	4x15W	475	475	80
AC 336		3x36W PL	475	475	80

LOUVER MODEL

code	louver	alum. material
SN	Simple parabolic	Normal
DN	Double parabolic	Normal
SB	(Sapin) stepped	Bright anodised
DB	Double parabolic	Bright anodised
DM	Double parabolic	Matt anodised
PR	PRismatic	
OP	OPal	

