


Decorative Surface Mounted



* Emergency kit + back mirror optional

Astra Fluorescent Luminaire

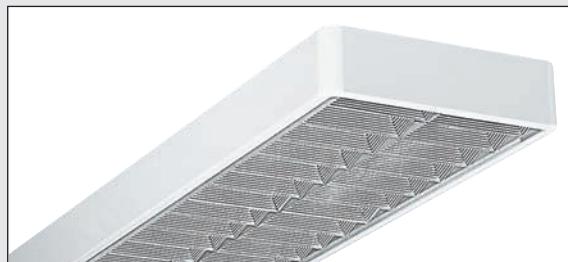


AP-SN
2601

Surface mounted fluorescent fitting with bright aluminum single parabolic louvers with stepped transversal blades. This insures a high performance with good visual comfort and an economical solution intended for universal use.



AP-SB
2602

Single parabolic bright reflector made of preanodised high quality low iridescence aluminum with christmas tree stepped transversal blades, offering a high light output ratio and a uniform distribution of light flux.

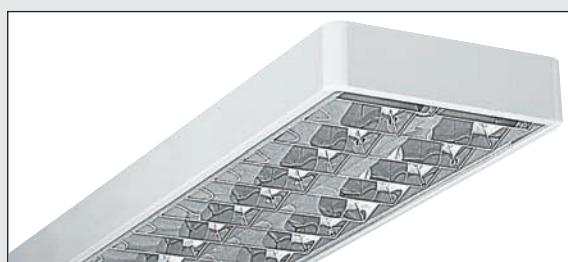

AP-DB
2603

Double parabolic bright reflector made of preanodised, high quality, low iridescence aluminum. This luminaire insures a low luminance at cut-off angles and exceptional visual comfort where extensive use of VDT's is required. The high gloss reflector has a dark light effect.



AP-DM
2604

Double parabolic matt-finish high performance reflector made of preanodised, low iridescence high quality aluminum. This low glare fixture has the advantage of minimizing the contrast between the ceiling and the louver making it suitable for intensive use in VDT areas.



AP-PR
2607

Prismatic methacrylate diffuser enclosed in a tight aluminum frame finished white equipped with a sealing gasket (optional) and spring catches for easy maintenance. IP 40 optional

AP

Surface mounted decorative fluorescent fitting with aesthetic round corners aimed for the intensive use in:

- Banks
- Hospitals
- Commercial centers
- Reception areas
- Shops
- Schools

Housing made of sheet steel painted electrostatically with white epoxy-polyester powder. Corners are of white injected resin giving an elegant and vivid outlook.


A wide range of louvers can be applied to suit the installation requirements [Cat 2].

This louver is fitted with four springs and can be hung on two of them for maintenance without the use of tools.

LOUVER MODEL

code	louver	alum. material
SN	Simple parabolic	Normal
DN	Double parabolic	Normal
SB	(Satin) stepped	Bright anodised
DB	Double parabolic	Bright anodised
DM	Double parabolic	Matt anodised
PR	Prismatic	
OP	Opal	

LOUVER CODE	lamps	L	W	H
AP 218	2x18W	634	296	80
AP 418	4x18W	634	630	80
AP 136	1x36W	1235	200	80
AP 236	2x36W	1235	296	80
AP 436	4x36W	1235	630	80
AP 258	2x58W	1535	296	80



		960°C Hot wire test
	Class I IP 43	2 joules Shock resistance