

Beamlight BL

Suspended & Surface

Made of extruded aluminum, the Beamlight series is usually placed as a continuous installation. Its modern and aesthetic outlook follows the new trend of lighting applications: Custom made production, Beamlight offers extremely flexible design choices that can be adapted to suit the different requirements of the same space.

It can also be designed in a multitude of ways to meet the client's expectations. Due to the variety of connectors it is possible to join till 4 modules together with different angles and directions.

There are several ways to mount this luminaire:

- Suspended.
- Surface mounted.
- Partially embedded in ceiling.
- Embedded in ceiling. [An opening must be prepared during installation of false ceiling in order to place the luminaire.]
- Beginning from the ground, passing along walls and slabs.

Electrical installations can be placed in this luminaires, such as wires, plugs, baffles...

Multiline beamlight presents an extreme modularity for future changes. By replacing the cover with a new one, it is possible to incorporate future sources of lighting technologies.




BL 1003 Suspended or surface Beamlight with 2x5312 OP and 1x5306 (2x26W-PL)



BL 1006 Suspended or surface Beamlight with 2x5312 OP and 1x5302 - 2 spots



BL 1009 Suspended or surface Beamlight with 2x5306 (2x26W-PL), 1x5303 and 2x5301 - 2 spots

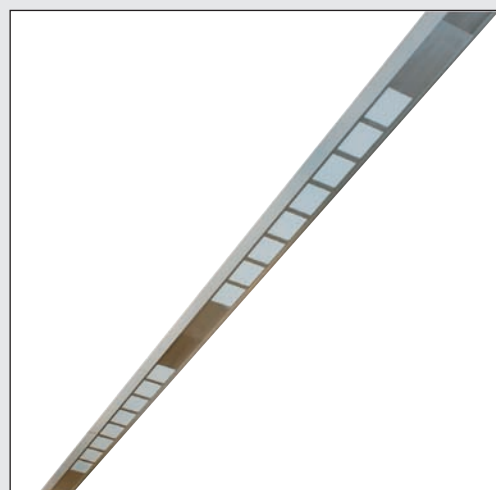

BL 1010 Suspended or surface Beamlight with 2x5312 OP



BL 1004 Suspended or surface Beamlight with 1x5311 - GR and 2x5301 - 1 spot



BL 1005 Suspended or surface Beamlight with 3x5312 - OP, 2x5302 - 2 spots and 1x5303 3 spots



BL 1007 Suspended or surface Beamlight with 3x5301 - 1 spot



BL 1008 Suspended or surface Beamlight with 2x5306 (2x26W - PL)



BL 1011 Suspended or surface Beamlight with 2x5301 - 1 spot and 2x5302 - 2 spots



BL 1012 Suspended or surface Beamlight with 3x5312 OP and 2x5301 - 1 spot