


Surface Mounted Luminaire



** Emergency kit (optional)*

Astra Fluorescent Luminaire

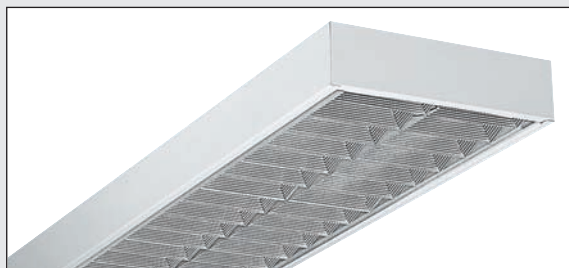


AM-SN
2901

Surface mounted fluorescent fitting with bright aluminum single parabolic louvers with stepped transversal blades. This insures a high performance with good visual comfort and an economical solution intended for universal use.



AM-SB
2902

Single parabolic bright reflector made of preanodised high quality low iridescence aluminum with christmas tree stepped transversal blades, offering a high light output ratio and a uniform distribution of light flux.

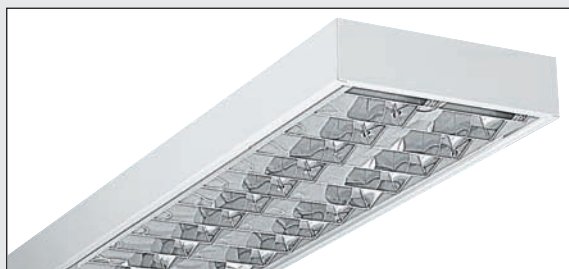

AM-DB
2903

Double parabolic bright reflector made of preanodised, high quality, low iridescence aluminum. This luminaire insures a low luminance at cut-off angles and exceptional visual comfort where extensive use of VDT's is required. The high gloss reflector has a dark light effect.



AM-DM
2904

Double parabolic matt-finish high performance reflector made of preanodised, low iridescence high quality aluminum. This low glare fixture has the advantage of minimizing the contrast between the ceiling and the louver making it suitable for intensive use in VDT areas.



AM-PR
2905

Prismatic methacrylate diffuser enclosed in a tight aluminum frame finished white equipped with a sealing gasket (optional) and spring catches for easy maintenance. IP 44 optional

AM

Surface mounted fluorescent fittings of classical and robust appearance with a high performance / price ratio.
Applications:

- Banks
- Hospitals
- Schools
- Gymnasium
- Lobby
- Reception rooms
- Corridors

Body in sheet steel painted white electrostatically with epoxy-polyester powder. Bright and matt-finish louvers can be fitted to this luminaire according to application requirements. The louver is positioned with the aid of four springs and can be lowered and hung from either side without tools.

		lamps	L	W	H
AM 218	LOUVER CODE	2x18W	634	296	80
AM 418		4x18W	634	630	80
AM 236		2x36W	1235	296	80
AM 336		3x36W	1235	475	80
AM 436		4x36W	1235	630	80

LOUVER MODEL

code	louver	alum. material
SN	Simple parabolic	Normal
DN	Double parabolic	Normal
SB	(Sapin) stepped	Bright anodised
DB	Double parabolic	Bright anodised
DM	Double parabolic	Matt anodised
PR	PRismatic	
OP	OPal	

